



PTDM27

Inclination sensor with robust plastic housing



- **Measurement range up to $\pm 180^\circ$**
- **Single or dual axis measurement**
- **Protection class IP67**
- **Longitudinal water barrier; potted electronics**
- **Wear-free MEMS technology, shock resistant**

Product version



Digital output CAN



PTDM27 - Inclination sensor in MEMS technology Version with digital output CAN

Specifications


		Order options
Output	CANopen (Profil „inclinometer“) CAN SAE J1939	1 CANOP CANJ1939
Measurement range	±180° with 1 axis ±60° with 2 axes	
Resolution	0.05°	
Linearity	±0.5°	
Output delay	0.1 s ... 10 s / 90%, configurable	
Housing material	Plastic	
Mounting	Screws M4: DIN 912, DIN 6912, DIN 7984	
Protection class	IP67	
Connection	Cable 0.3 m with connector M12, 5 pin Deutsch connector, not shielded	2 KAB0,3M-M12/CAN
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks	
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles	
Temperature range	-40° ... +85°C	
Weight	approx. 20 g (without cable)	
EMC	DIN EN 61326-1:2013	

Order code

PTDM27 – **1** – **2**

Order example: PTDM27 – CANOP – KAB0,3M – M12/CAN

Dimensions

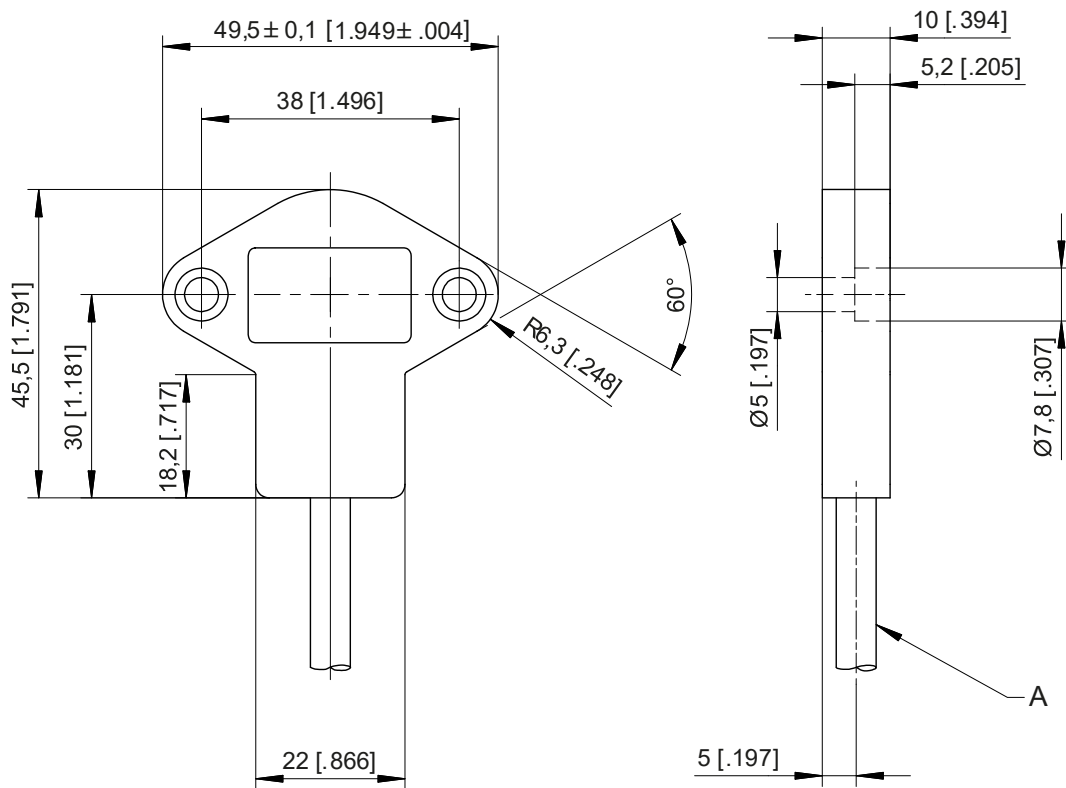

A – Cable

Dimensions in mm [inch].


Dimensions informative only.

For guaranteed dimensions consult factory.


Output specification

CANOP CANopen 	Communication profile	CANopen CiA 301 V 4.02, Slave
	Encoder profile	CiA 410 V 1.2, Profile „Inclinometer“
	Configuration services	LSS, CiA Draft Standard 305 (Transmission rate, node ID)
	Error Control	Node guarding, Heartbeat, Emergency message
	Node ID	Adjustable via LSS or SDO, default: 127
	PDO	1 TxPDO, 0 RxPDO, no linking, static mapping
	PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
	SDO	1 Server, 0 Client
	Certified	yes
	Transmission rate	50 kBit ... 1 Mbit, adjustable via LSS or SDO, default: 125 kBit
	Bus connection	M12 connector, 5 pin
	Bus with integrated terminating resistance	optional
	Bus, galvanic isolated	no

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	15 mA typical at 24 V DC 30 mA typical at 12 V DC 100 mA max.
	Measuring rate	1 kHz (standard)
	Stability (temperature)	$\pm 100 \times 10^{-6}$ / °C f.s.
	Repeatability	1 LSB
	Operating temperature	-40 ... +85 °C
	Protection	Reverse polarity, short circuit
	EMC	DIN EN 61326-1:2013

Signal wiring	Output signals	Connector pin no.
Connector M12, 5 pin 	Shield	1
	Excitation +	2
	GND	3
	CAN-H	4
	CAN-L	5


View to the sensor connector

CANJ1939 SAE J1939 	CAN specification	ISO 11898, Basic and Full CAN 2.0 B	
	Transceiver	24V-compliant, not isolated	
	Communication profile	SAE J1939	
	Transmission rate	250 kbit/s	
	Address	Default 247d, configurable	
NAME Fields	Arbitrary address capable	1	Yes
	Industry group	0	Global
	Vehicle system	7Fh (127d)	Non specific
	Vehicle system instance	0	
	Function	FFh (255d)	Non specific
	Function instance	0	
	ECU instance	0	
	Manufacturer	145h (325d)	Manufacturer ID
	Identity number	0nnn	Serial number 21 bit
Parameter Group Numbers (PGN)	Configuration data	PGN EF00h	Proprietary-A (PDU1 peer-to-peer)
	Process data	PGN FFnnh	Proprietary-B (PDU2 broadcast); nn Group Extension (PS) configurable
Specifications	Excitation voltage	8 ... 36 V DC	
	Excitation current	15 mA typical at 24 V DC 30 mA typical at 12 V DC 100 mA max.	
	Measuring rate	1 kHz (standard)	
	Stability (temperature)	$\pm 100 \times 10^{-6} / ^\circ\text{C}$ f.s.	
	Repeatability	1 LSB	
	Operating temperature	-40 ... +85 °C	
	Protection	Reverse polarity, short circuit	
	EMV	DIN EN 61326-1:2013	
Signal wiring Connector M12, 5 pin  View to the sensor connector	Output signals		Connector pin no.
	Shield		1
	Excitation +		2
	GND		3
	CAN-H		4
	CAN-L		5

Position of the inclination axis and characteristic of the linear output PTxM27


PTxM27

1 axis

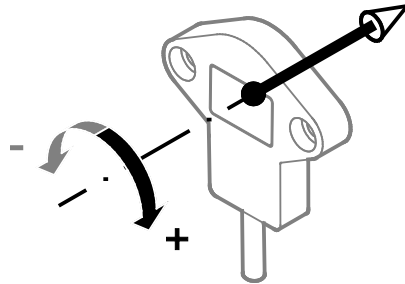


PTxM27

2 axes

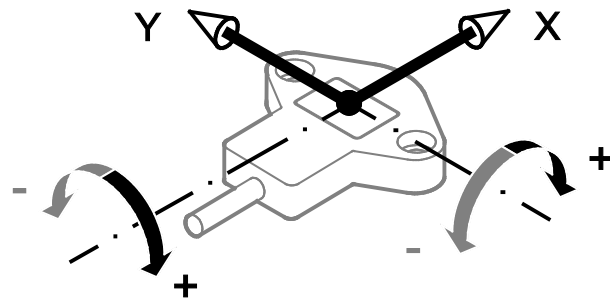

Output signal

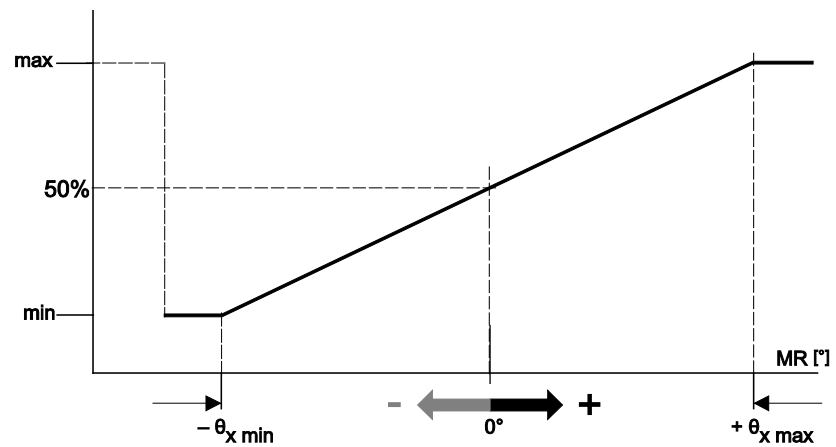


Accessories

Connector/bus cable M12, 5 pin CAN-Bus

The 5-lead shielded cable is supplied with a female 5 pin M12 connector at one end and a male 5 pin M12 connector at the other end.

Available lengths are 0.3 m, 2 m, 5 and 10 m.

Cable diameter: 6.7 ±0.2 mm

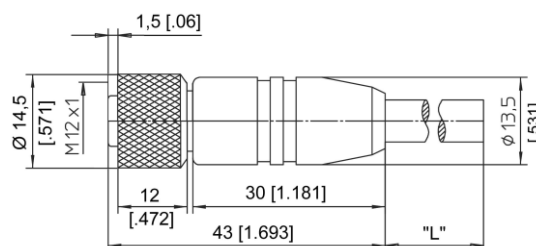

Order code

	KAB - xM - M12/5F/G - M12/5M/G - CAN
IP69:	KAB - xM - M12/5F/G/69K - M12/5M/G/69K - CAN
xM = length in m	

T-connector for bus cable M12, 5 pin CAN-Bus

Order code

KAB - TCONN - M12/5M - 2M12/5F - CAN



Terminating resistor M12, 5 pin CAN-Bus

Order code

KAB - RTERM - M12/5M/G - CAN



Applicable for cable carriers

Maximum movement speed	3 m/s
Maximum acceleration	5 m/s ²
Minimum bending radius	10 x cable diameter